




Free Standing – 10kg Payload – High Speed

- Shock repetition rate of up to 1 shock per second.
- Full closed loop shock amplitude control.
- 320 x 250mm payload area.
- Shock amplitudes of up to 300g.
- Ideal for production testing



The STM10 is the smallest of our flat bed shock machines offering cost effective shock testing up to 300g. Several machines have been delivered to automobile component suppliers in the field of production quality control together with research and development. Test items are mounted on a 320x250mm aluminium table which can be adapted to interface with quick release platforms for minimum setup time on the production line. Table lifting is achieved by a built in pneumatic ram which is then accelerated down allowing the table to free fall. Through utilisation of timer counters coupled to high precision valves controlled by our **IMPALA** software, this machine generates highly repeatable shocks at a **rate of up to 60/minute**.

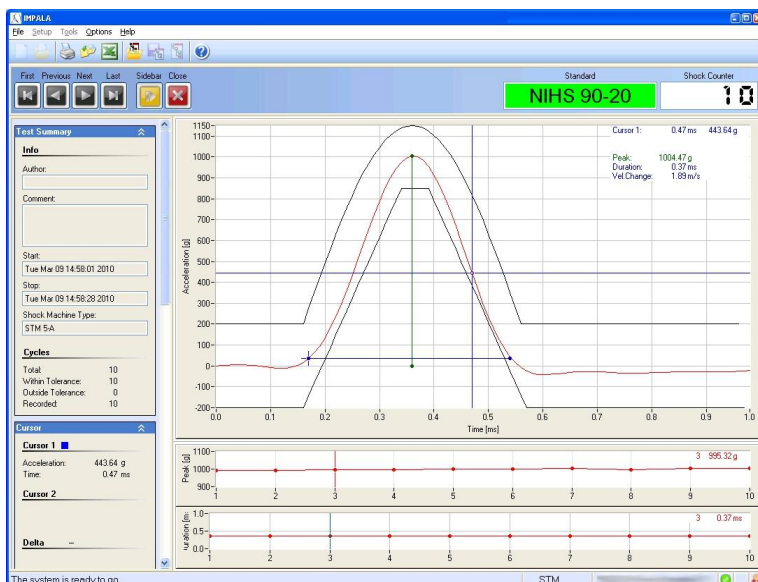

IMPALA is a closed loop control and visualisation software that continuously monitors the response signal from the test item mounting platform. Any change in the response amplitude will be immediately corrected ensuring continuous high quality shocks. A range of current industry standard tolerance zones can be selected and displayed over the response waveform. Full remote control is available for integration into the production environment.



Technical Specification

PERFORMANCE AND TEST ITEM MOUNTING	
Maximum Test Item Weight	10kg
Mounting Surface	320mm x 250mm
Maximum Acceleration	up to 300g
Shock Pulse Width Limits	0.8ms to 20ms
Maximum Velocity Change	0.13 - 1.7m/s
Shock Repetition Rate	up to 60/minute
Performance Chart	
PHYSICAL	
Machine Weight	ca. 340kg
Required Floor Area	450mm x 380mm
Outside Dimensions	420mm x 350mm x 530mm high
REQUIRED UTILITIES	
Air Pressure	5-6 bar
Power	100 to 240VAC 50/60Hz
Software/PC	Microsoft® Windows® XP Professional SP 1 / 2xPCI slots

ELSTAR Elektronik AG
Hardstrasse 41
CH-5430 Wettingen
Switzerland
Tel: +41 (0)56 4271888
Fax: +41 (0)56 4271976

mail@elstar.com
www.elstar.com

