


Free Standing – 200kg Payload – High Speed

- Shock repetition rate of up to 1 shock per second.
- Full closed loop shock amplitude control.
- 600x800mm payload area.
- Shock amplitudes of up to 300g.
- Ideal for military component testing.




The STM200 meets the requirements of customers with higher mass test objects offering cost effective shock testing to in excess of 300g. As automobile component suppliers are building ever larger sub assemblies for a more efficient production line phase, there is requirement for larger capacity shock machines. Test items are mounted on a 600x800mm aluminium table which can be adapted to interface with quick release platforms for minimum setup time. The STM200 is equally suited to environmental testing. Table lifting is achieved by a built in pneumatic ram which is then accelerated down allowing the table to free fall. Through utilisation of timer counters coupled to high precision valves controlled by our **IMPALA** software, this machine generates highly repeatable shocks at a **rate of up to 60/minute**.

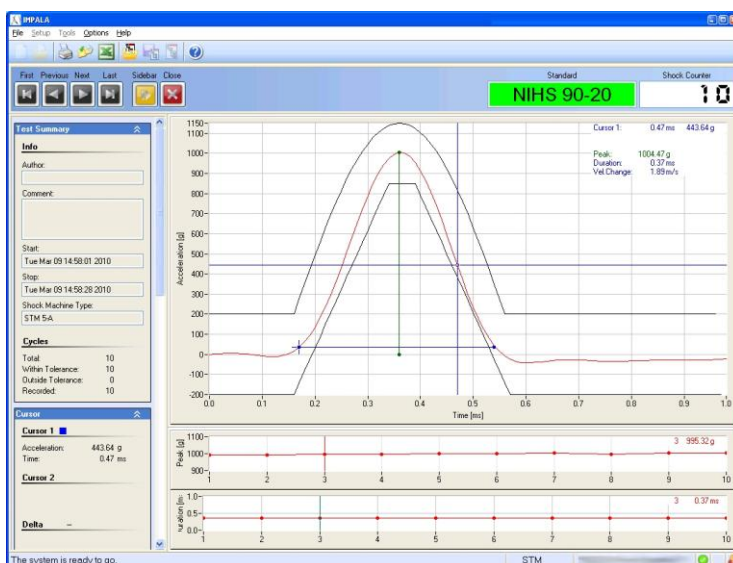

IMPALA is a closed loop control and visualisation software that continuously monitors the response signal from the test item mounting platform. Any change in the response amplitude will be immediately corrected ensuring continuous high quality shocks. A range of current industry standard tolerance zones can be selected and displayed over the response waveform. Full remote control is available for integration into the production environment.

Technical Specifications

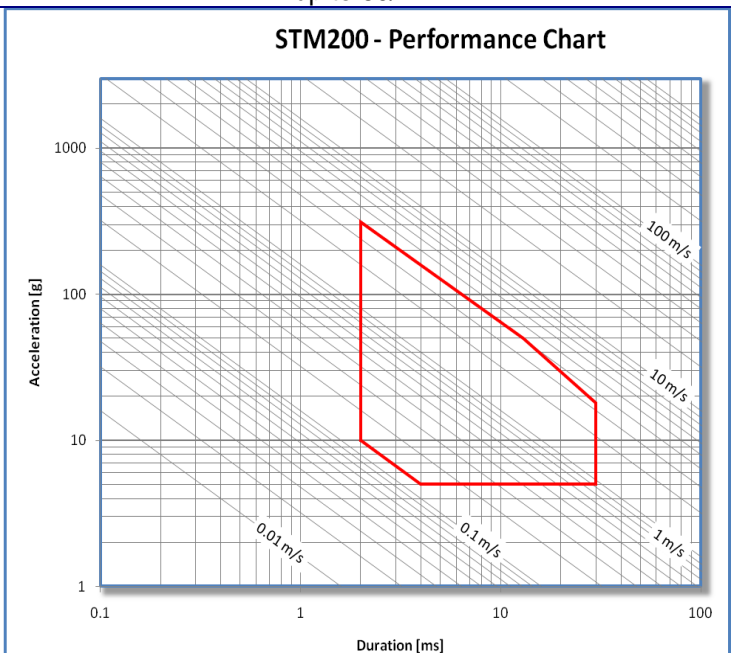PERFORMANCE AND TEST ITEM MOUNTING	
Maximum Test Item Weight	200kg
Mounting Surface	600mm x 800mm
Maximum Acceleration	up to 300g
Shock Pulse Width Limits	2ms to 20ms
Maximum Velocity Change	0.13m/s to 4m/s
Shock Repetition Rate	up to 60/min
Performance Chart	 <p style="text-align: center;">STM200 - Performance Chart</p>
PHYSICAL	
Machine Weight	Ca. 2500kg
Required Floor Area	650mm x 850mm
Outside Dimensions	600mm x 800mm x 1375mm high
REQUIRED UTILITIES	
Air Pressure	5-6 bar
Power	100/240VAC 50/60Hz
Software	Microsoft® Windows® XP Professional SP 1 / 2xPCI slots

ELSTAR Elektronik AG
 Hardstrasse 41
 CH-5430 Wettingen
 Switzerland
 Tel: +41 (0)56 4271888
 Fax: +41 (0)56 4271976

Web: www.elstar.com
 eMail: mail@elstar.com

